



Heating cable Micro self-regulating

The heating cable ELSR-M is very flexible and is used for special applications where installation dimensions are needed to be kept small. It is particularly suited for short heating circuits. This heating cable can be used for frost protection and temperature maintenance up to 65 °C.

Advantages:

- Self-regulating
- Two nominal outputs
- Can be cut to length off the roll
- Moisture proof
- UV-resistant
- Small dimensions


Applications:

- Heat tracing on pipes, pumps and valves
- Food processing industry
- Automotive
- Heating of tube bundle cables for water analysis
- Heat tracing on vessels



Type **ELSR-M** up to 65 °C



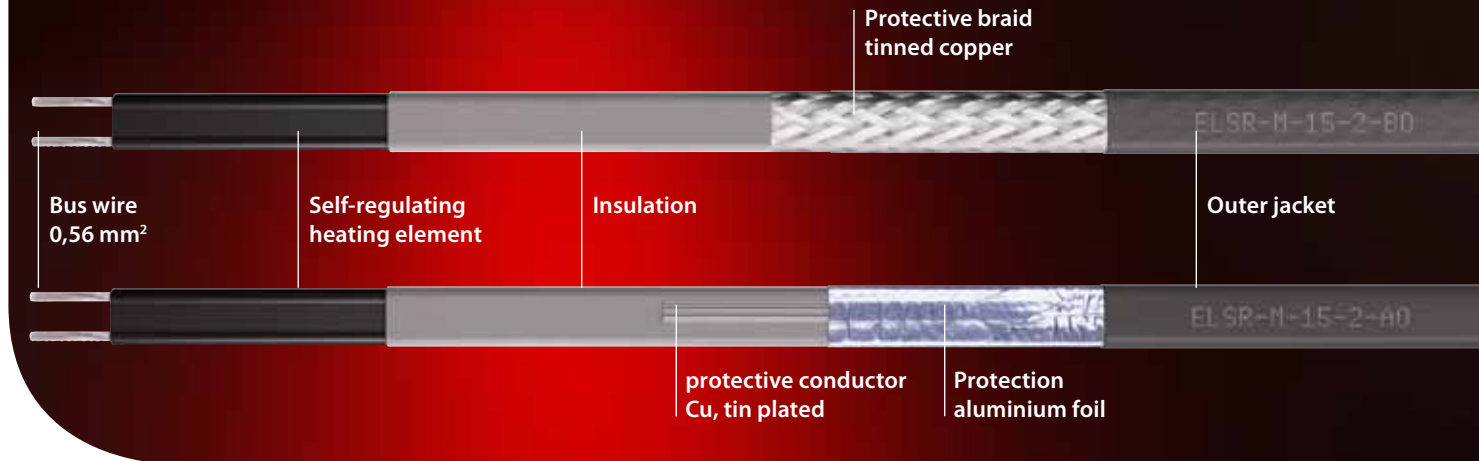

Technical information

Type ELSR-M up to 65 °C

Data

■ Outer jacket	TPE-O
■ Bus wire	nickel plated copper
■ Maximum exposure temperature (power off)	65 °C
■ Maximum exposure temperature (power on)	65 °C
■ Nominal voltage	230 V
■ Bending radius, minimum	25 mm
■ Installation temperature, min.	-45 °C

Design

■ BO	Protective braid and a thermoplastic outer jacket
■ AO	Aluminium foil and a thermoplastic outer jacket

Type	Nominal output	Dimensions approx. (mm)	Weight approx. (g/m)	Item n°
ELSR-M-10-2-AO	10 W/m at 10 °C	8,0 x 5,5	53	B0225110
ELSR-M-10-2-BO	10 W/m at 10 °C	8,5 x 5,8	62	B0225102
ELSR-M-15-2-AO	15 W/m at 10 °C	8,0 x 5,5	53	B0225160
ELSR-M-15-2-BO	15 W/m at 10 °C	8,5 x 5,8	62	B0225152

Heating circuit lengths ELSR-M-...-2 Heating circuit lengths ELSR-N-...-2 on the following conditions:

- 230 V nominal voltage
- Delayed action circuit breakers (C-characteristic) with 80 % maximum load
- Maximum 10 % line voltage drop on the heating cable bus wire
- One (1) single end power input heating cable

Switch-on temperature	Nominal cutout value	Heating circuit length (m) for	
		ELSR-M-10-2	ELSR-M-15-2
10	10	126,5	98,0
	16	126,5	105,5
	20	126,5	105,5
0	10	115,5	83,0
	16	115,5	97,5
	20	115,5	97,5
-10	10	100,0	72,0
	16	106,5	91,0
	20	106,5	91,0
-20	10	87,0	64,0
	16	99,5	85,5
	20	99,5	85,5
-40	10	69,0	52,0
	16	88,5	77,0
	20	88,5	77,0

ELSR-L-...-2 output

(on insulated metallic pipes in accordance with EN 62395-1)

